

Optimization of CO₂ Sequestered as a Residual Phase in Brine-Saturated Formations

GCCC Digital Publication Series #03-03

Mark H. Holtz



Keywords:

Geologic Sequestration- Optimization, Pore Geometry Modeling, Residual Phase Saturation

Cited as:

Holtz, M.H., 2003, Optimization of CO₂ sequestered as a residual phase in brine-saturated formations (abs.), *in* Briefing book: Second Annual Conference on Carbon Sequestration: developing & validating the technology base to reduce carbon intensity, Alexandria, Virginia, May 5–9, unpaginated. GCCC Digital Publication Series #03-03.

Optimization of CO₂ Sequestered as a Residual Phase in Brine-Saturated Formations

Mark H. Holtz

Geologic sequestration of CO₂ in brine-saturated formations has been proposed as a possible method to reduce emissions of this greenhouse gas to the atmosphere. To optimize this method the largest possible volume of CO₂ should be sequestered over geologic time. This optimization goal can best be achieved by sequestering CO₂ as a residual phase under the most advantageous geological conditions. Geological conditions that impact the volume of CO₂ stored as a residual phase include petrophysics, burial effects, temperature and pressure gradients, and CO₂ pressure-volume-temperature character. Analyzing and integrating all of these properties results in an optimal CO₂ sequestration depth for a given geologic subprovince.

The integrated sequestration optimization model was constructed from petrophysical, geological, and CO₂ characteristics. Sequestering CO₂ as a residual nonwetting phase is the key to maintaining its residency in rock over geologic time. Thus residual saturation and porosity were pivotal modeling characteristics. Sediment burial depth affects porosity, temperature, and pressure; consequently, they were integrated together in the model. Finally, CO₂ density as a function of temperature and pressure was accounted for, resulting in a model that combines all the salient properties that affect the amount of CO₂ that can reside in buried rock.

A sequestration optimization curve for the Frio Formation, Upper Texas Gulf Coast, indicates that the largest volume of CO₂ could be trapped as a residual phase at about 11,000 feet. The sequestration optimization curve of depth versus CO₂ density is a concave-down parabolic shape having a broad maximum, indicating the optimal sequestration depth. Additionally, this depth decreases the risk of surface leakage and increases the differential between hydrostatic and lithostatic pressure, both characteristics having sequestration benefits.

END

OPTIMIZATION OF CO₂ SEQUESTERED AS A RESIDUAL PHASE IN BRINE-SATURATED FORMATIONS

Mark H. Holtz

Bureau of Economic Geology, John A. and Katherine G. Jackson School of Geosciences,
The University of Texas at Austin

ABSTRACT

Geologic sequestration of CO₂ in brine-saturated formations has been proposed as a possible method to reduce emissions of this greenhouse gas to the atmosphere. To optimize this method the largest possible volume of CO₂ should be sequestered over geologic time. This optimization goal can best be achieved by sequestering CO₂ as a residual phase under the most advantageous geological conditions. Geological conditions that impact the volume of CO₂ stored as a residual phase include petrophysics, burial effects, temperature and pressure gradients, and CO₂ pressure-volume-temperature character. Analyzing and integrating all of these elements result in an optimal CO₂ sequestration depth for a given geologic subprovince.

The integrated sequestration optimization model was constructed from petrophysical, geological, and CO₂ characteristics. Sequestering CO₂ as a residual nonwetting phase is the key to obtaining its residency in rock over geologic time. Thus residual saturation and porosity were pivotal modeling characteristics. Sediment burial depth affects porosity, temperature, and pressure; thus, they were integrated. Finally, CO₂ density as a function of temperature and pressure was accounted for, resulting in a model that combines all the salient properties that affect the amount of CO₂ that can reside in buried rock.

A sequestration optimization curve for the Frio Formation, upper Texas Gulf coast, indicates that the largest volume of CO₂ could be trapped as a residual phase at about 11,000 feet. The sequestration optimization curve of depth versus CO₂ density is a concave-down parabolic shape with a broad maximum, indicating the optimal sequestration depth. Additionally, this depth decreases the risk of surface leakage and increases the pressure differential between hydrostatic and lithostatic, both characteristics with sequestration benefits.


NEW SEQUESTRATION PARADIGM

- Sequester CO₂ as a residual phase saturation by capillary forces

PREVIOUSLY SUGGESTED APPROACHES TO GEOLOGIC SEQUESTRATION

- Structural trapping
- Mineral trapping
- Solution trapping
- Trapping associated with enhanced oil
- Trapping associated with coalbed methane

FLOW & SATURATION DEFINITIONS

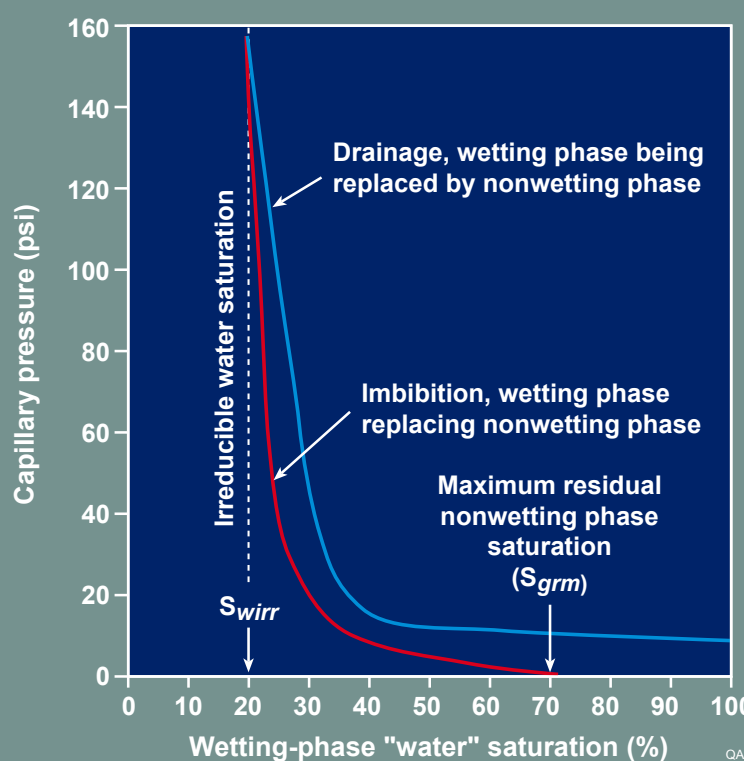


The hysteresis between drainage and imbibition causes a residual nonwetting phase saturation to occur in rocks.

THEORETICAL AND EXPERIMENTAL INVESTIGATION

PORE-SCALE NONWETTING PHASE TRAPPING MODELS

Pore Doublet Model


- Moore and Slobod, 1956

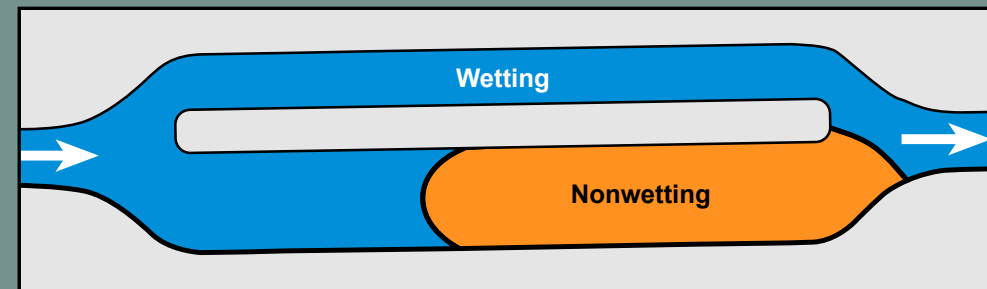

Capillary force holds nonwetting phase in larger pore


Dead-end Model

- Buoyancy forces of nonwetting CO₂ can form a microtrap

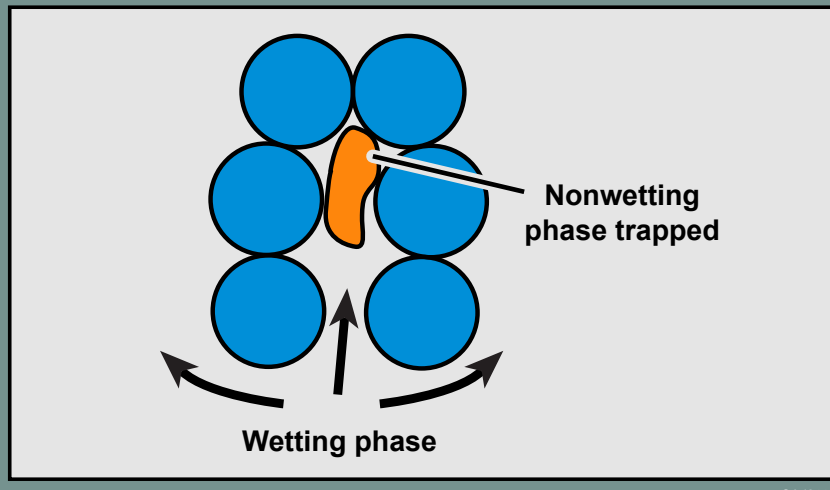

Pore Snap-off Model

- Oh and Slattery, 1976

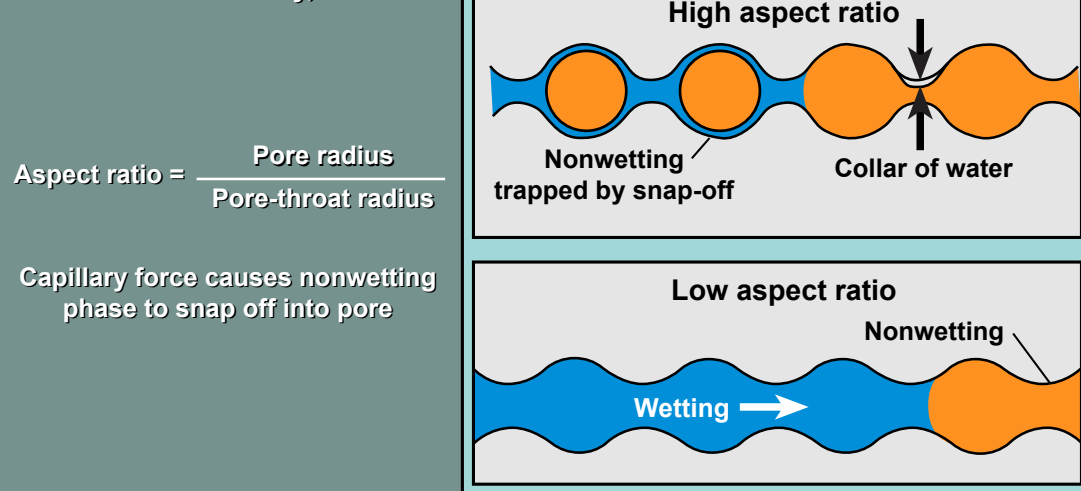

EXPERIMENTAL INVESTIGATIONS


- Wardlaw, 1982
 - Applied glass tubes micromodel
 - Demonstrated snap-off
 - Concluded that snap-off caused residual saturation and was strongly affected by pore/pore-throat aspect ratio
- Chatzis et al., 1983
 - In consolidated cores 80% of trapped nonwetting phase was caused by snap-off

EMPIRICAL INVESTIGATIONS

Measurement and Correlation with Other Properties

- Properties having poor or no correlation on S_{gr}
 - Imbibition mechanism, rate, and nonwetting fluid type (Geffen et al., 1952; Cromwell et al., 1952; Jerauld, 1996; Kite et al., 1956)
 - Temperature and pressure (Geffen et al., 1952; McKay, 1956; Delclaud, 1991)
 - Permeability (Keelan, 1978)
- Properties having a correlation on S_{gr}
 - Rock and pore type, grain size, and sorting
 - Wetting strength
 - Porosity


GEOLOGIC EFFECTS ON RESIDUAL GAS SATURATION

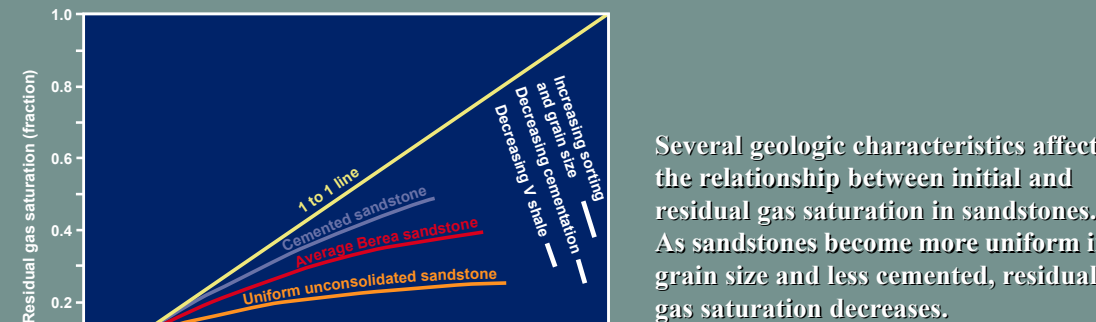

Several geologic characteristics affect the relationship between initial and residual gas saturation in sandstones. As sandstones become more uniform in grain size and less cemented, residual gas saturation decreases.


POROSITY EFFECTS ON RESIDUAL GAS SATURATION

S_{gr} vs Porosity

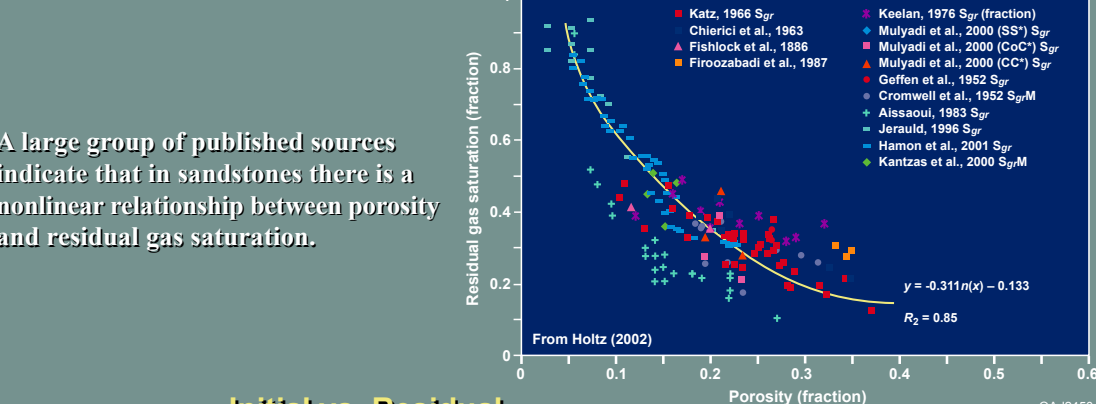


A large group of published sources indicate that in sandstones there is a nonlinear relationship between porosity and residual gas saturation.

Initial vs. Residual Nonwetting Phase Saturation

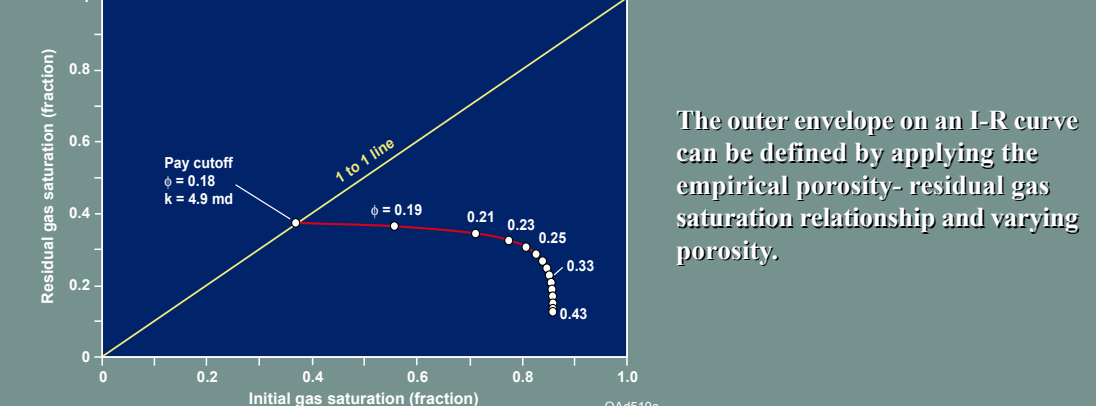

The outer envelope on an I-R curve can be defined by applying the empirical porosity-residual gas saturation relationship and varying porosity.

Gas Initial-Residual Curves

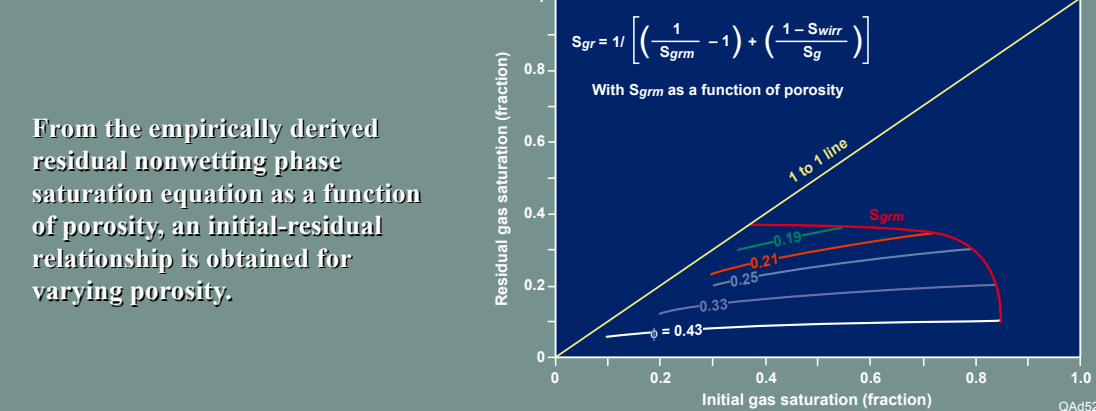


From the empirically derived residual nonwetting phase saturation equation as a function of porosity, an initial-residual relationship is obtained for varying porosity.


PORE GEOMETRY MODELING OF ASPECT RATIO

POROSITY REDUCTION MODEL

Delaunay cell as unit bulk volume

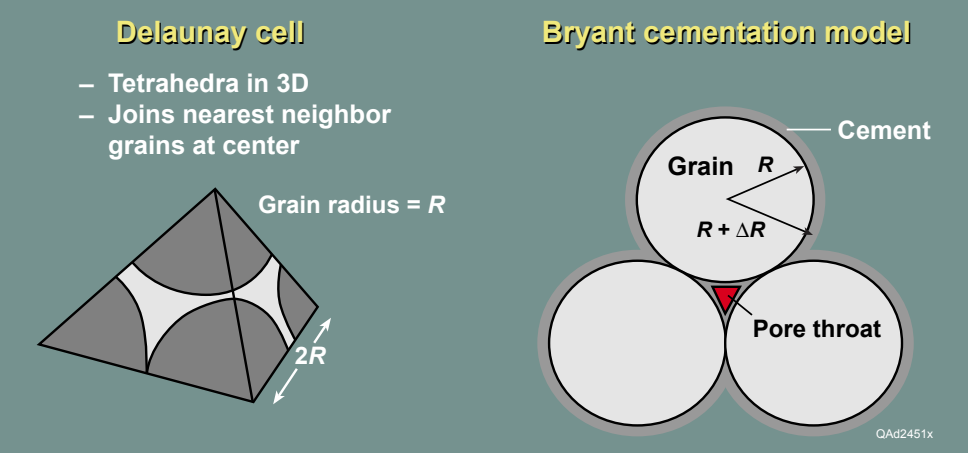


Bryant cementation model

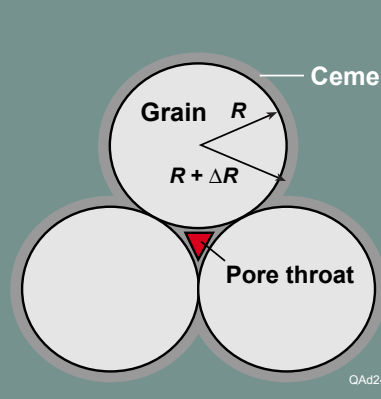

PORE/PORE-THROAT ASPECT RATIO MODEL


- Apparent pore radius (R_{pa})
 - Approximate pore volume as a sphere
 - Apparent pore-throat radius (R_{pta})
 - Approximate radius as a circle from pore-throat area
 - Incrementally increase cementation in Delaunay cell
 - Decreases porosity (pore throat and pore size)
- $$\phi = 2.6289 \left[1 + \frac{\Delta R}{R} \right]^2 - 7.2655 \left[1 + \frac{\Delta R}{R} \right] + 5.0014$$
- Calculate aspect ratio as a function of porosity

POROSITY INFLUENCE ON ASPECT RATIO

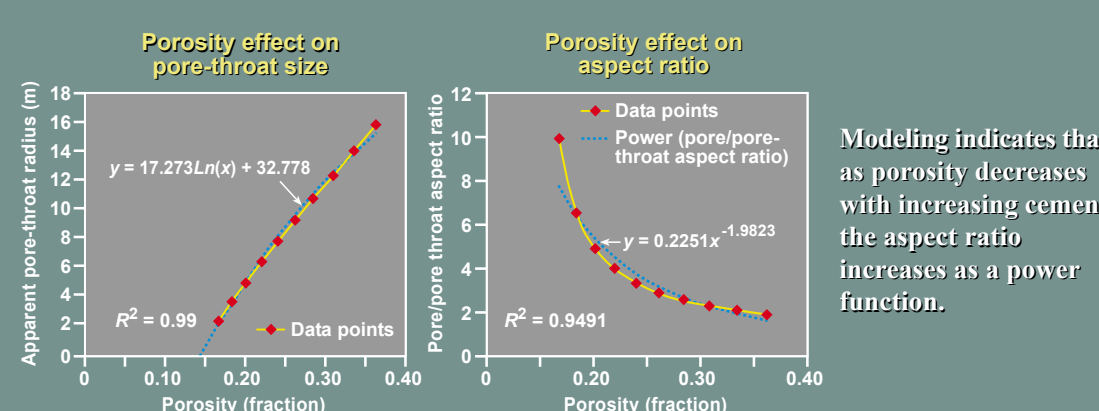


Modeling indicates that as porosity decreases with increasing cement the aspect ratio increases as a power function.

RESIDUAL GAS SATURATION AS A FUNCTION OF ASPECT RATIO

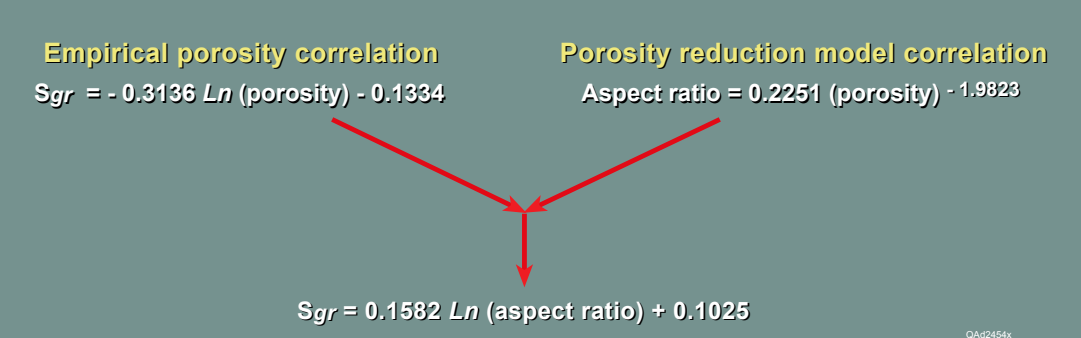


RELATIONSHIP BETWEEN ASPECT RATIO AND RESIDUAL GAS SATURATION

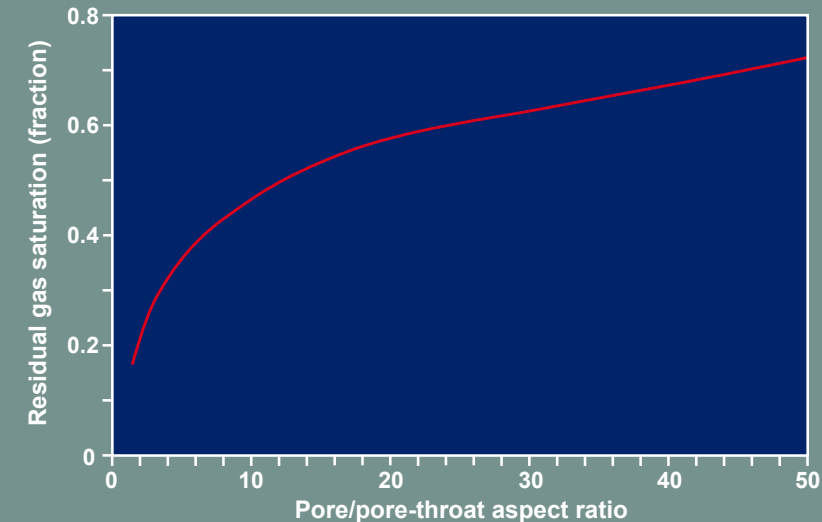


By combining the relationships of core-measured porosity - residual gas saturation with the porosity - aspect ratio model relationship, there can be derived an equation of residual gas saturation as a function of aspect ratio.

DEVELOPMENT OF A CO₂ SEQUESTRATION OPTIMIZATION CURVE Example from the Upper Gulf Coast, Texas

LOCATION OF UPPER GULF COAST FRIO SANDSTONE DISTRIBUTION AND FRIO RESERVOIRS

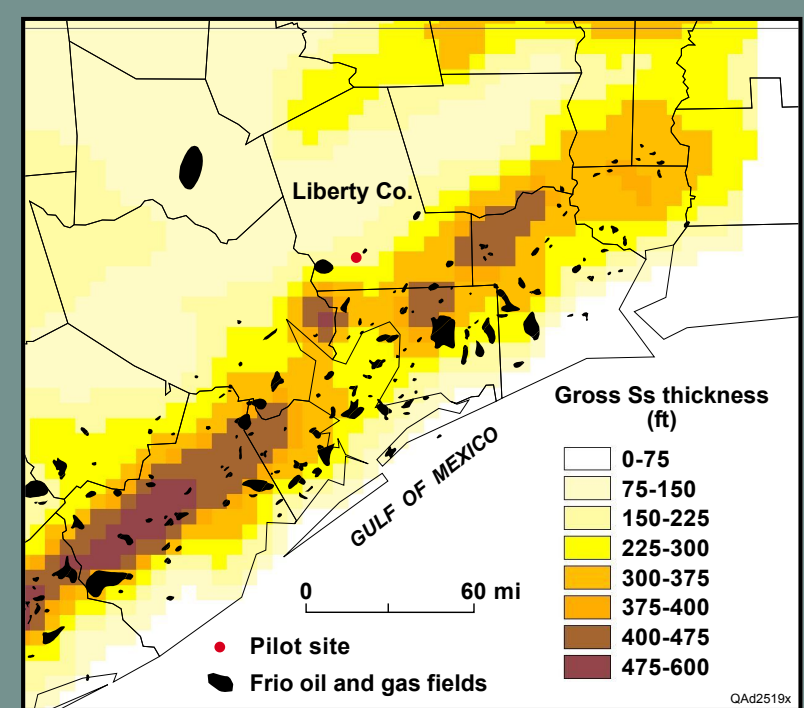


PROPERTY CHANGES WITH DEPTH POROSITY AND CO₂ DENSITY

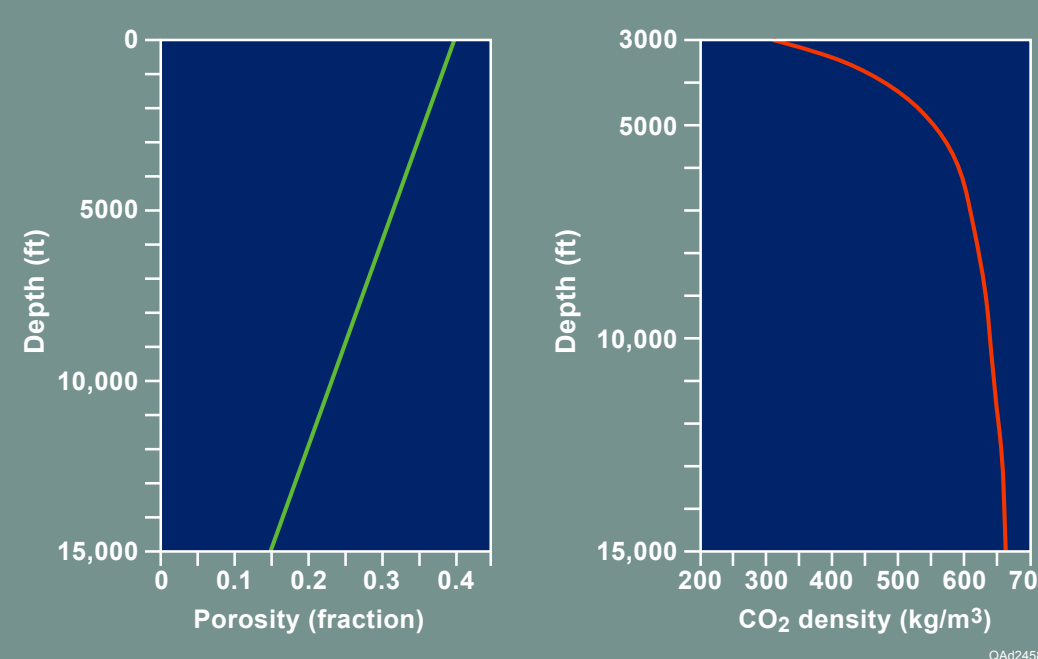


In the upper Gulf coast Texas Frio porosity decreases with depth. Temperature and pressure increase with depth, which results in CO₂ density increasing with depth. Therefore, depth increases oppose each other in optimizing CO₂ sequestration because the volume to store CO₂ decreases with depth at the same time the amount of CO₂ that can be stored per unit volume increases.

CO₂ SEQUESTRATION OPTIMIZATION CURVE

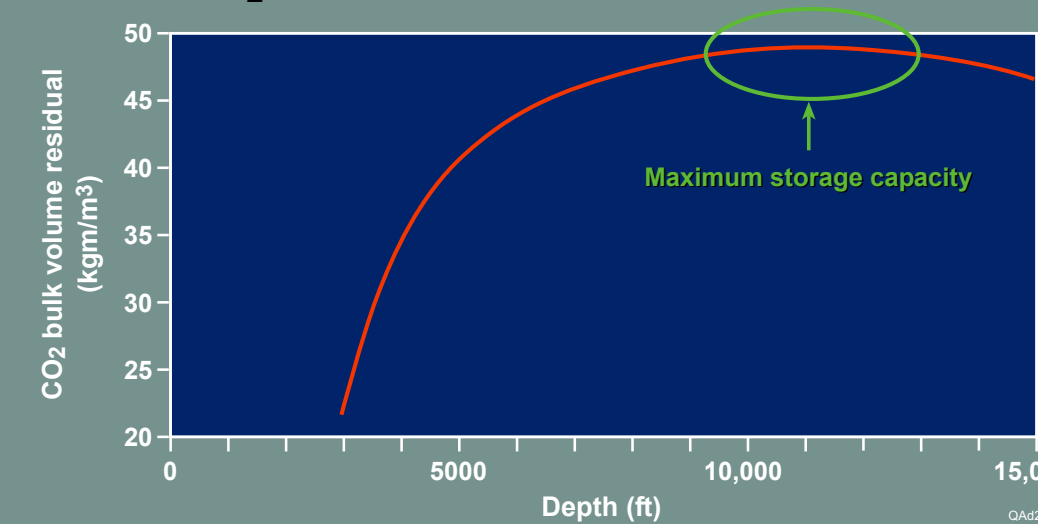


A sequestration optimization curve can be calculated by combining the effects of CO₂ density, temperature, pressure, burial depth, porosity, and residual gas saturation. The optimization curve is nonlinear and displays a maximum storage capacity between 9,000 and 13,000 ft deep.

COMPARISON OF FRIO SGR WITH PUBLISHED DATA

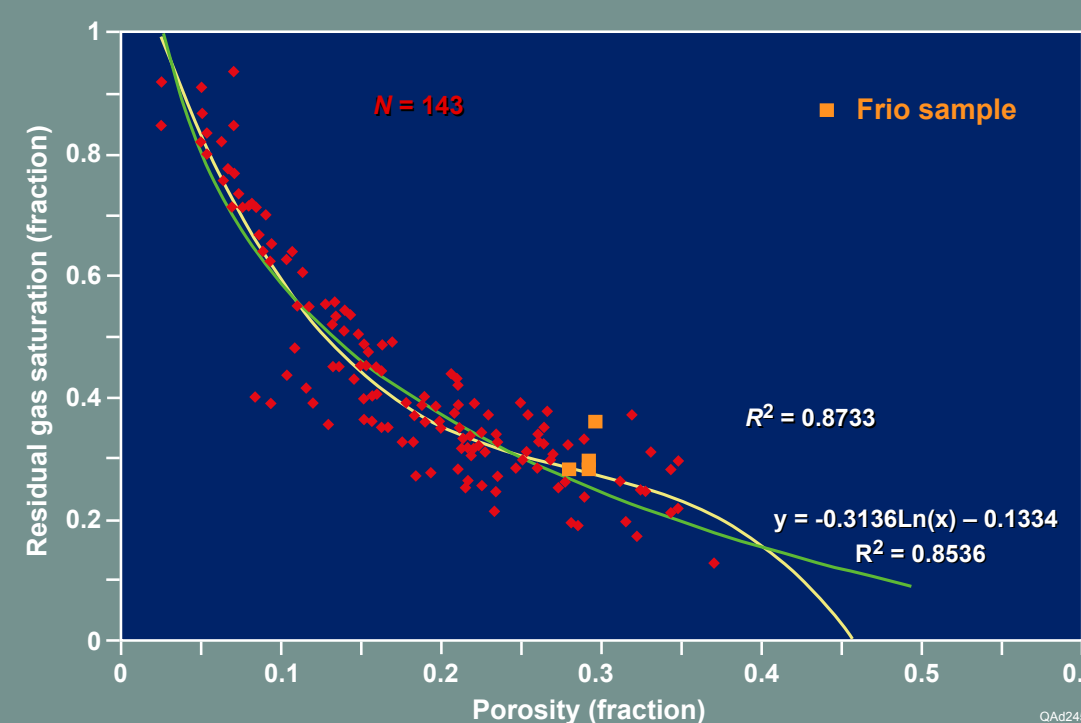


The Frio barrier bar samples from the upper Gulf coast have a residual gas saturation - porosity character very similar to that shown in other published sandstone data indicating that the general sandstone model is applicable.

RESIDUAL PHASE SEQUESTRATION OPTIMIZATION CURVE

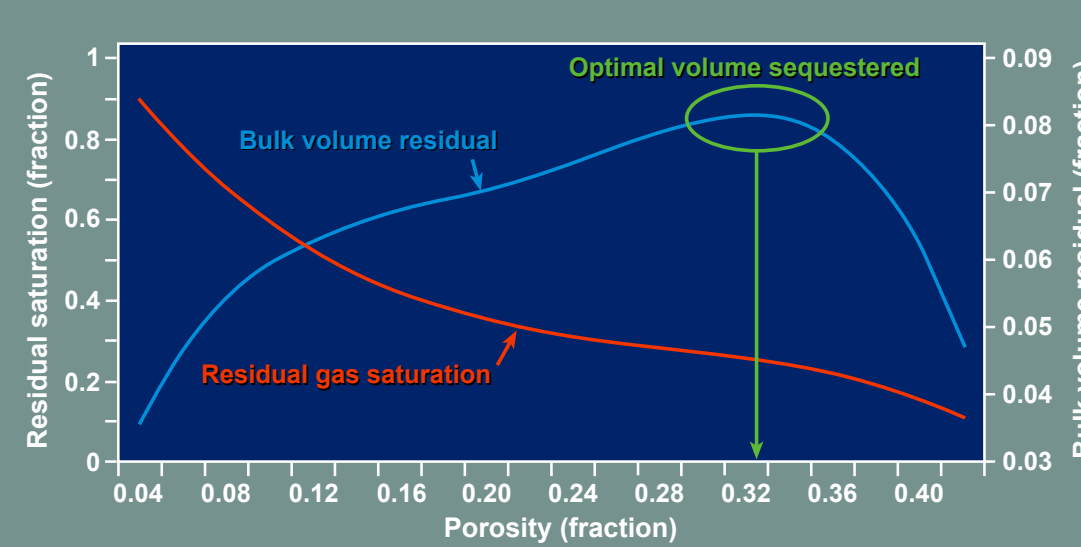

The objective of CO₂ sequestration is to trap the largest volume possible over geologic time. A maximum volume of CO₂ trapping as a residual phase takes place at 0.32 porosity when both residual phase saturation and pore volume are accounted for.

DEPTH OPTIMIZATION AIDED BY SECONDARY POROSITY DEVELOPMENT

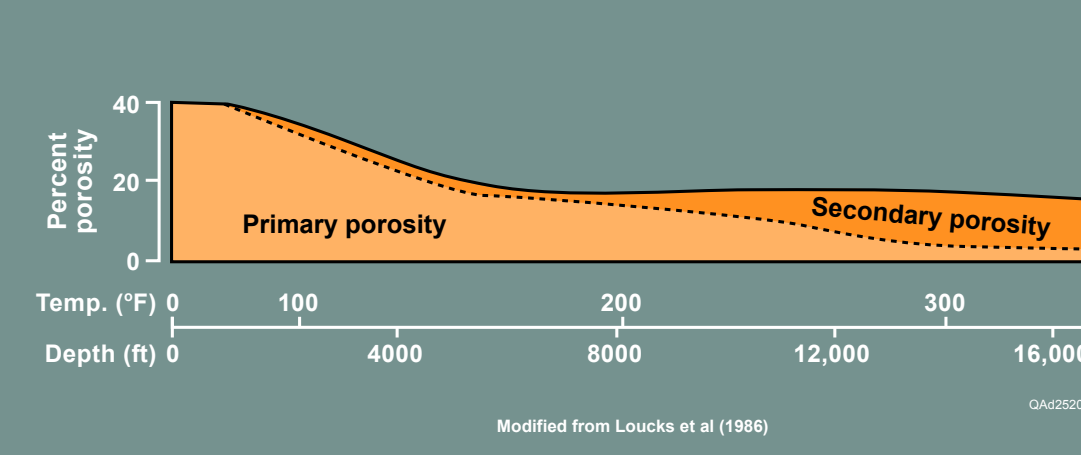

An added feature that makes deep CO₂ storage in the Frio more favorable is the increase in secondary porosity with depth. Secondary porosity increases the aspect ratio, thereby increasing residual nonwetting phase saturation.

SUMMARY AND CONCLUSIONS

OPTIMIZATION OF CO₂ SEQUESTRATION IN THE UPPER GULF COAST, FRIO FORMATION

- A depth of 9,000 - 13,000 ft is the optimal sequestration depth from the perspective of optimizing volume of residual saturation
- At this increased depth the additional influence of secondary porosity aids in optimization by increasing the aspect ratio
- Deep depths reduce the risk of any mobile CO₂ migrating to the surface
- The pressure difference between hydrostatic pressure and rock fracture pressure increases with depth

CONCLUSIONS

- Residual nonwetting phase saturation is a logarithmic function of porosity.
- The increase in aspect ratio with decreasing porosity in intergranular porosity is a likely control on residual phase saturation.
- The greatest bulk volume storage of a nonwetting phase in sandstones occurs at 0.32 porosity.
- CO₂ sequestration optimization is a function of temperature, pressure, CO₂ density, burial depth, porosity, and residual gas saturation.
- The optimal depth to sequester CO₂ in the Gulf Coast Frio Formation is between 9,000 and 13,000 ft.
- CO₂ optimization curves are necessary when determining regional sequestration potential.
- To sequester CO₂ over geologic time, one of the most promising and previously neglected mechanisms would be to trap it as a nonwetting residual phase.

ACKNOWLEDGMENTS

Funding for this project is from DOE/NETL. A special thank you goes to Dr. Steve Bryant, Dr. Sue Hovorka, and Paul Knox for their help and to Kerr-McGee Oil and Gas Onshore LLC for the contribution of data.